


SNUBBER
MODEL : A050



SERVICE INTENDED

Used for suppressing the effect of pressure pulses and pressure spike. It features an adjustable needle valve to enable to restricting flow as operating conditions may demand.

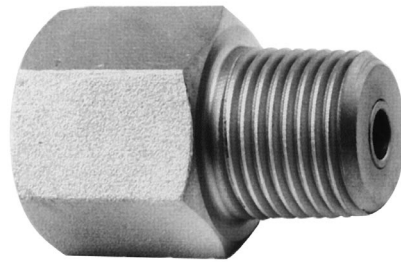

ORDERING INFORMATION


BASE MODEL - 1st thru 4th characters
A050 : SNUBBER

5th Character		6th Character		7th Character		8th Character	
Code	Unused Character	Code	Material	Code	Gauge Connection Size	Code	Gauge Connection Type
A		D	316SS	1	3/8"	A	PF(F)
				2	1/2"	B	PT(F)
						C	NPT(F)
		Z	Other	9	Other	Z	Other

9th Character		10th Character		11th thru 15th Character	
Code	Process Connection Size	Code	Process Connection Size	Code	Unused Character
C	3/8"	G	PF(M)	A0000	
D	1/2"	H	PT(M)		
		J	NPT(M)		
Z	Other	Z	Other		

A050AD2BDJA0000 SAMPLE ORDERING NUMBER

A050 : SNUBBER

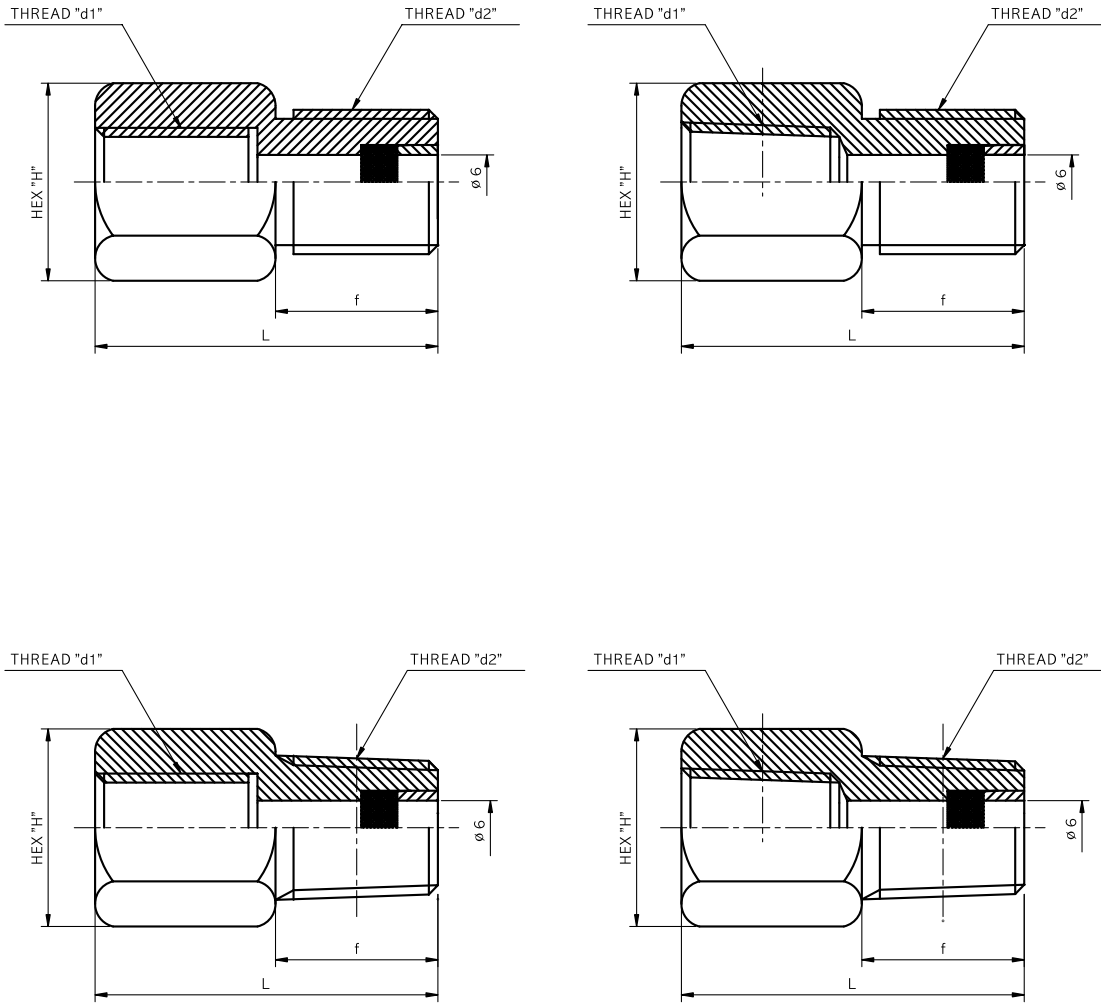

* L : MAKER STANDARD

d1			d2		
→	PF	1/2	→	PF	→ 3/8
→	PT		→	PT	→ 1/2
→	NPT		→	NPT	
SELECTION : →					